



Cut here to remove. Do Not Tear!

FLY CREEK UL1 AND UL2 SET UP INSTRUCTIONS

1. Remove contents from stuff sack. Spread tent body out on ground.
2. Assemble the pole. Be careful to insert each pole section into the next by hand instead of allowing the shock cord to snap them together to ensure each pole section is fully seated.
3. Insert the pole tips into the grommets at the front corners and foot of the tent.
4. Attach the "H Clip" to the underside of the "S Stopper".
5. Attach all "Twist Clips" to the pole.
6. Stake out the two cord loops at the head of the tent and the three loops at the foot.
7. Drape the rainfly over the tent so that the door on the fly lines up with the door on the body.
8. On the underside of the fly are two clips that dangle from webbing. They are sewn into the hem on the sides of the fly. Clip these to the corresponding webbing loops sewn into the tent body. The loops are on each side midway between the head and foot of the tent body.
UL2: There are four clips on the underside of the fly. On each side of the fly there is one clip at the hem and one directly above it on the backside of the guylines attachment point.
9. Make sure the webbing at the corners of the rainfly is completely slackened. Attach the buckles on the rainfly to those on the tent body.
10. Attach the two cord loops at the rear of the fly to the stakes that you used for the tent body.
11. Stake out the vestibule.
12. Evenly tension the webbing on each corner as needed to keep the rainfly taut.
13. Stake out all guylines.

**Separate 6", large diameter pole segment included for emergency field repair.
Slide repair pole over the break to act as a splint.**

FAST FLY SET UP INSTRUCTIONS

If you purchase the optional Big Agnes footprint for your Fly Creek UL tent it will enable you to pitch a shelter while leaving the tent body behind. The Fast Fly configuration requires the footprint, rainfly, poles and stakes.

1. Lay the footprint on the ground and stake out.
2. Assemble the pole.
3. Insert the pole ends into the grommets at the front corners and rear of the footprint.
4. Drape the rainfly over the tent.
5. Make sure the webbing at the corners of the rainfly is completely slackened. Attach the buckles on the rainfly to those on the footprint.
6. Attach the two cord loops at the rear of the fly to the stakes that you used for the footprint.
7. Stake out the vestibule.
8. Evenly tension the webbing on each corner as needed to keep the rainfly taut.
9. Stake out all guylines.

DAC Hardware:




H Clip




S Stopper



Twist Clip



Tent body

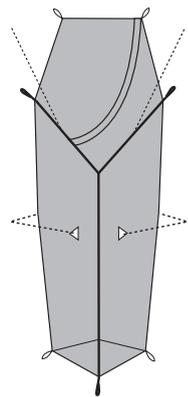

Tent with Fly



----- Cut here to remove. Do Not Tear! -----

P.O. Box 773072 • Steamboat Springs, Colorado • 80477
 Toll Free: 877.554.8975 • info@bigagnes.com • www.bigagnes.com



For more information on Tent Care or our Warranty and Return policy, see www.bigagnes.com or call 877-554-8975.

Repairs and Warranty

All Big Agnes tents are guaranteed against manufacturing or material defect. We do not warranty products damaged from normal wear and tear, alteration made by owner, misuse, accidents or damages caused by uses other than intended. Damage due to misuse, normal wear and tear, or improper care may be repaired, at the discretion of Big Agnes, at a reasonable charge. Tents returned for repair must be clean and free of debris.

Zippers

Keeping your zippers clean will help keep the coils and sliders from wearing out. If filled with dirt, vacuum or brush zippers before storing tent. Try to avoid liquid lubricants because they attract dirt.

Seam Sealing

Seam tape alone is durable enough to prevent water leakage. Any seams that have been taped do not need to be seam sealed with a liquid sealer unless you want extra protection. Make sure the seam-sealer is completely dry before re-packing your tent. Damage caused by misapplication may void warranty.

Cleaning

For light cleaning, you can sponge the tent with warm water. If it's necessary to wash the entire tent, always use cleaners recommended specifically for tents. We recommend McNett Mirazyme cleaner, or Nikwax Tech Wash. Do not dry clean or machine-wash your tent. Detergents and dry cleaning solvents will damage the fabric and ruin waterproofing. Never use hot water, bleach, liquid detergents or dishwashing liquids.

Storage

Always make sure your tent is dry and free of debris before storing. Stuff or fold your tent differently each time to avoid permanent creases. Store in a cool, dry place. Never leave your tent in hot temperatures (such as a car trunk or attic space), as it will damage the material coatings. Storing your tent damp can result in mildew growth, which may cause your tent to smell, leak or delaminate. Mildew damage is not covered under warranty.

TENT CARE

- Our tents are easy to set up but we suggest you practice once at home before using them for the first time to avoid late night bickering with tent mates while fumbling around in the dark.
- Before pitching tent, clear campsite of debris that may pierce tent floor.
- Big Agnes tents are all freestanding, but we recommend staking them out to increase space and keep your tent from becoming a tumbleweed.
- Hang onto your stuff sacks or they'll blow away and create backcountry litter.
- Pull on the pole sleeve fabric when inserting poles to avoid any bunching in the material.
- Push rather than pull poles through pole sleeves.

HELPFUL HINTS FOR TENT SET UP

Thanks for choosing a Big Agnes tent! Please feel free to contact us if you have any questions or comments.
 info@bigagnes.com or call toll free 877-554-8975



Fly Creek UL2

Fly Creek UL1