



HUBBA HUBBA™

Assembly Instructions

Please follow these instructions to guide you through assembly only. For complete instructions on the recommended care and use of your tent, please refer to Owner's Manual at www.msrgear.com/tents/ownersmanual.

PACKAGE INCLUDES:

6 stakes, 1 repair sleeve




MOUNTAIN SAFETY RESEARCH®

© 2011 Cascade Designs, Inc.
4000 First Avenue South
Seattle, WA 98134 USA

1-800-531-9531 or 1-206-505-9500


1 PREPARE FOR SETUP

1. Spread tent out; stake out four corners tightly.
2. Insert poles into round hub before assembling tent.

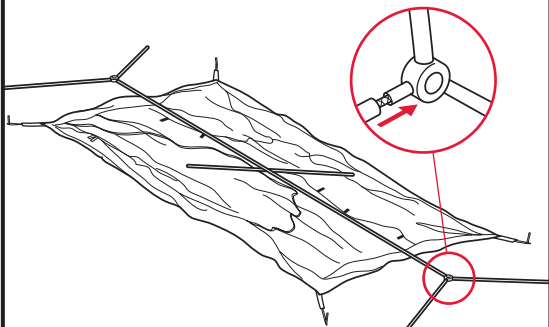


2 ATTACH HUBBED POLES

1. Insert tips of two short end sections of hubbed pole into grommets at one end of tent floor then the other.
2. Insert short cross pole into two grommets at midpoint of tent ceiling.

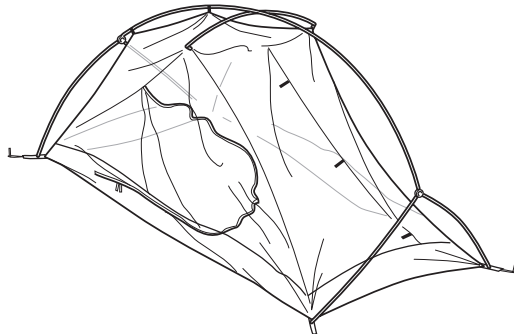


3 ATTACH CLIPS

1. Attach clips to pole along length of tent and cross pole.

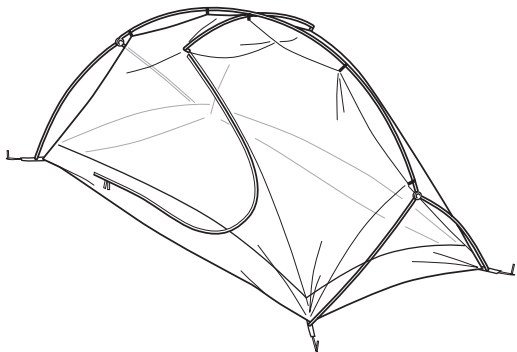

4 ATTACH RAINFLY

1. Lay rainfly over tent and attach midpoint rainfly grommets to short cross pole.
2. Slide adjustable loop grommets under ends of poles at all four corners.
3. Pull out vestibules until taut and stake down.

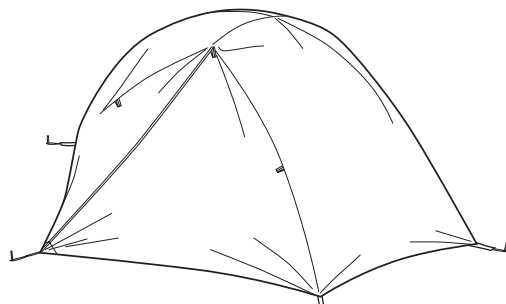

Note: All tents require staking. Unstaked tents are susceptible to blowing away. In some conditions, additional stakes and cord will be necessary. Re-adjustment of stakes and rainfly may be necessary to keep tent tight and weatherproof. Footprints help to keep your tent clean, dry, and protected from abrasion. Following these tips will prolong the life of your tent.